


MOSFET II

WITH WIRING

UP TO
4S / 14.8V
LIPOL

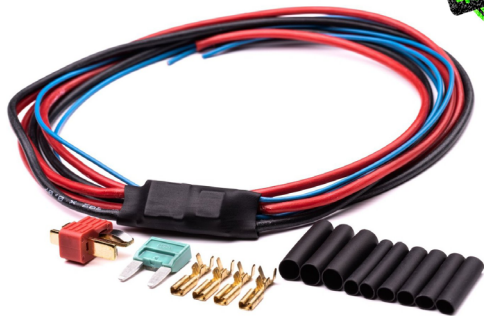

Limitation: spring M210 (current 50A)

This device has to install expert.

He must know how to disassemble airsoft gun and solder.

Never use soldering gun!

www.jefftron.net



How connect device into the gun

- 1) Red wire lead to the battery positive (leads with black wire)
Add fuse on this wire close to the battery (included in package)
- 2) Black wire lead to the battery negative (leads with red wire)
- 3) Red wire lead to the motor positive (leads with blue wires)
- 4) Black wire lead to the motor negative (leads with blue wires)
- 5) Blue wire lead to the one trigger contact in the mechabox
- 6) Blue wire lead to the another trigger contact in the mechabox

Be extra sure to connect wires appropriately, otherwise you could destroy the device, weapon or battery.

